


## Features

- Vibrantly and consistent printing quality
- Strong durable base fabric
- Great cost-effective
- Matte & Glossy surface available
- Best suited for indoor/outdoor front-lit displays

## Applications

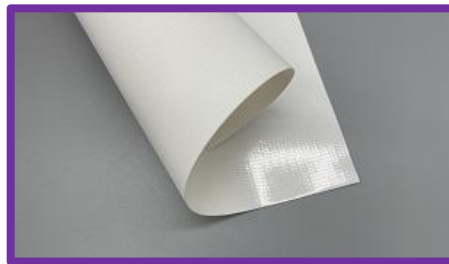

## Technical Data Sheet

Item Code	FBLFFX10101212510		Test Method
Base Fabric	1000D*1000D 12*12		DIN EN ISO2060
Weight (GSM)	510		DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	1300	ISO527/3:1995
	Weft (N/5cm)	1300	ISO527/3:1995
Tear Strength	Warp (N/5cm)	250	ISO4674/1:2003
	Weft (N/5cm)	220	ISO4674/1:2003
Adhesion Strength	N/A		DIN53357:1982
Temperature	-30°C/+70°C		ISO13934-1:1999
RF Weldable (Heat Sealable)	YES		DIN53354
Flame Retardant	B1/M1/M2/NFPA701		

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.

## Ink Printability

SOLVENT

ECO-SOLVENT

UV

LATEX

SCREEN PRINTING



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,  
Haining, Zhejiang, China  
Tel: +86-573-80776996 Fax: +86-573-80776998  
Mob/Skype/Wechat/WhatsApp: +86-15858322153  
<mailto:contact@hncomax.com> <https://www.hncomax.com>

